


PX2KREX

PX2KREX GLOBALLY APPROVED, EXPLOSIVE ATMOSPHERE RAPIDEX BARRIER CABLE GLAND

FOR ALL TYPES OF ARMoured CABLES


- RapidEx liquid pour sealing system
 - Enhances reliability, reduces risk
 - Reduces man hours
 - Reduces cost
- Metal-to-metal armour clamping
- Direct and remote installation
- Integral protected deluge seal
- Controlled outer load retention seal
- Unique OSTG prevents over tightening
- -60°C to +85°C
- Globally marked, UL, cCSAus, IECEx, ATEX and UKEX
- Superior EMC performance
- As standard in nickel plated brass with NPT thread form
- RapidEx liquid barrier resin seals around internal cable cores after removing any cable inner sheath/bedding; completely eliminating any risk of coldflow

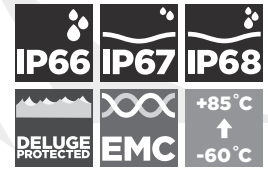

SUPPLIED IN PACK WITH RAPIDEX RESIN

TECHNICAL CLASSIFICATION	
DESIGN SPECIFICATION	BS 6121: Part 1:1989, IEC 62444, EN 62444
MECHANICAL CLASSIFICATION*	Impact = Level 8, Cable Anchorage = Class D
ENCLOSURE PROTECTION	IK10 to IEC 62262 (20 joules) Brass & Stainless Steel only
ELECTRICAL CLASSIFICATION*	Category B (Category A when used with braid, tape or pliable wire armour cables)
INGRESS PROTECTION RATING**	IP66, IP67 & IP68****
DELUGE PROTECTION COMPLIANCE	DTS01 : 91
CABLE TYPE	Single Wire Armour (SWA), Aluminium Wire Armour (AWA), Wire Braid Armour (e.g. SWB), Screened Flexible (EMC) Wire Braid (e.g. CY / SY), Pliable Wire Armour (PWA), Steel Tape Armour (STA), Strip Armour (e.g. ASA)***
ARMOUR CLAMPING	Detachable Resin Tube / Cone & AnyWay Universal Clamping Ring
SEAL MATERIAL	CMP SOLO LSF Halogen Free Thermoset Elastomer / RapidEx Resin Barrier
SEALING TECHNIQUE	Unique CMP Outer Seal (Load Retention Seal)
SEALING AREA(S)	Inner RapidEx Barrier Seal & Outer Sheath
CABLE GLAND MATERIAL	Brass, Electroless Nickel Plated Brass, Stainless Steel, Aluminium

* Mechanical & Electrical Classifications applied as per IEC 62444 & EN 62444 ** When CMP installation accessories are used. Refer to www.cmp-products.com for further information. ***Where the cable is permitted by code (NEC and/or CEC) **** IP68 tested to a minimum depth of 30 metres for 12 hours, alternative depths / durations can be provided upon request.

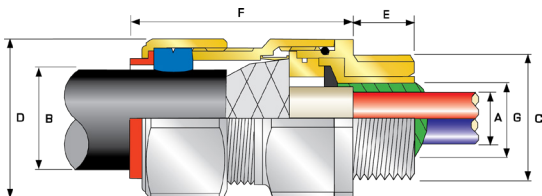

PATENT GRANTED: ES 2287986, NO 2287986, TR 2287986, AU 2010284848, AU 2014274614, GB 2485114, SG 178839, US 8872027, US 9484133, US 9774178, MY 153846, US 10193321, US1034078

† Grooved Cone (X) is predominantly used for Wire Braid (e.g. GSWB, TCWB), Steel Tape Armour (STA, DSTA) and Aluminium Strip Armour (ASA) but is also suitable for Single Wire Armour (SWA), Aluminium Wire Armour (AWA) and Pliable Wire Armour (PWA) if the range is outside that of the Stepped Cone (W). Grooved Cone (X) dimensions shown in the Cable Gland Selection Table below are for a double wire strand or braided armour cables. Tapes can also be doubled over. For cables that have only a single layer of armour such as SWA the clamping range should be used as shown in the table below. Stepped (W) Cone is suitable for Single Wire Armour (SWA), or Aluminium Wire Armour (AWA) cables.

GLOBAL PRODUCT CERTIFICATION			
ATEX CERTIFICATE	CML18ATEX1325X, CML18ATEX4317X	IECEx CERTIFICATE	IECEx CML 18.0182X
UKEX CERTIFICATE	CML 21UKEX1214X, CML 21UKEX4215X	CODE OF PROTECTION	Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da, Ex nR IIC Gc, Ex eb I Mb*
CODE OF PROTECTION	⊕ II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da ⊕ II 3G, Ex nR IIC Gc ⊕ I M2 Ex db I Mb*, Ex eb I Mb*	COMPLIANCE STANDARDS	EN 60079-0,1,7,15,31
COMPLIANCE STANDARDS	EN 60079-0,1,7,15,31	CSAus CERTIFICATE (20S16-90)	2288626
CSAus CODE OF PROTECTION**	Class I, Div 1 and 2, Groups A, B, C, and D; Class II, Div 2, Groups F, and G; Class III, Div 1 and 2; Type 4X; Oil Resistance II; Class I, Zone 1, AEx d IIC Gb, AEx e IIC Gb; Class I, Zone 2, AEx nR IIC Gc	cCSAus CODE OF PROTECTION**	Class I, Div 1 and 2, Groups A, B, C, and D; Class II, Div 2, Groups F and G; Class III, Div 2; Type 4X; Oil Resistance II; Ex nR IIC Gc
COMPLIANCE STANDARDS	CAN/CSA-C22.2 No 0.18,25,30,174,94, CAN/CSA-C22.2 No 60079-0,1,7,15,31 CAN/CSA-E61241-1, ANSI/UL 514B, 50, 2225, ANSI/ISA 60079-31, UL60079-0,1,7,15	cULUS CERTIFICATE (20S16-90)	E161256
CODE OF PROTECTION**	Class I Div 1 and 2, Groups A,B,C, and D; Class II Div 1 and 2, Groups F, and G	COMPLIANCE STANDARDS	UL 2225, CSA C22.2 No 174, UL 514B, CSA C22.2 No 18, CSA C22.2 No 30
COMPLIANCE STANDARDS	UL 2225, CSA C22.2 No 174, UL 514B, CSA C22.2 No 18, CSA C22.2 No 30	ECAS CERTIFICATE	24-03-106290/E24-03-110155/NB0007
ECAS CERTIFICATE	24-03-106290/E24-03-110155/NB0007	UKrSEPRO CERTIFICATE	CL 19.0371X
EAC CERTIFICATE	RU C-GB.A.07.B.0459522	RETE APPROVAL NUMBER	EL-CS-220061
RETE APPROVAL NUMBER	EL-CS-220061	COE / PESO (INDIA) CERTIFICATE	P548696, P548695, P533772
CCC CERTIFICATE	2020322313003190	INMETRO APPROVAL	TUV 12.2073X
COMPLIANCE STANDARDS	UL 2225, CSA C22.2 No 174, UL 514B, CSA C22.2 No 18, CSA C22.2 No 30	KCs CERTIFICATE	19 AV4B0 0372X (Size 20s16 to 32), 19 AV4B0 0373X (Size 40 to 63s), 19 AV4B0 03774X (Size 63 to 100)
KCs CERTIFICATE	19 AV4B0 0372X (Size 20s16 to 32), 19 AV4B0 0373X (Size 40 to 63s), 19 AV4B0 03774X (Size 63 to 100)	MARINE APPROVALS	LRS: LR22320739TA, DNV: TAE000000, ABS: 20-LD1948801-PDA, BV: 43180
MARINE APPROVALS	LRS: LR22320739TA, DNV: TAE000000, ABS: 20-LD1948801-PDA, BV: 43180		

*Aluminium alloys are not permitted in Group I mining applications
**Where the cable is permitted by code (NEC and/or CEC)



COMBINED ORDERING REFERENCE			AVAILABLE ENTRY THREADS 'C'		NUMBER OF CORES	DIAMETER OVER CONDUCTORS 'A'	CABLE BEDDING DIAMETER 'G'	OVERALL CABLE DIAMETER 'B'		ARMOUR RANGE*				ACROSS FLATS 'D'	ACROSS CORNERS 'D'	PROTRUSION LENGTH 'F'	SHROUD	CABLE GLAND WEIGHT (kg)
										GROOVED CONE (X)	STEPPED CONE (W)	MIN	MAX					
SIZE	TYPE	ORDERING SUFFIX	METRIC	THREAD LENGTH 'E'	MAX	MAX	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX			
20S16	PX2KREX	1RA	M20	15.0	21	11.7	11.7	6.1	13.1	0.3	1.0	0.8	1.25	30.5	33.6	62.0	PVC06	0.24
20S	PX2KREX	1RA	M20	15.0	21	11.7	11.7	9.5	15.9	0.3	1.0	0.8	1.25	30.5	33.6	62.0	PVC06	0.23
20	PX2KREX	1RA	M20	15.0	21	12.6	12.9	12.5	20.9	0.4	1.0	0.8	1.25	30.5	33.6	63.0	PVC06	0.24
25S	PX2KREX	1RA	M25	15.0	30	17.5	17.9	14.0	22.0	0.4	1.2	1.25	1.6	37.5	41.3	69.5	PVC09	0.37
25	PX2KREX	1RA	M25	15.0	30	17.5	17.9	18.2	26.2	0.4	1.2	1.25	1.6	37.5	41.3	69.5	PVC09	0.37
32	PX2KREX	1RA	M32	15.0	50	23.6	23.9	23.7	33.9	0.4	1.2	1.6	2.0	46.0	50.6	75.0	PVC11	0.57
40	PX2KREX	1RA	M40	15.0	59	30.0	30.3	27.9	40.4	0.4	1.6	1.6	2.0	55.0	60.5	75.0	PVC15	0.80
50S	PX2KREX	1RA	M50	15.0	89	36.6	36.9	35.2	46.7	0.4	1.6	2.0	2.5	60.0	66.0	77.0	PVC18	0.90
50	PX2KREX	1RA	M50	15.0	89	41.0	41.3	40.4	53.0	0.6	1.6	2.0	2.5	70.0	77.0	77.0	PVC21	1.19
63S	PX2KREX	1RA	M63	15.0	115	47.9	48.4	45.6	59.4	0.6	1.6	2.0	2.5	75.0	82.5	79.7	PVC23	1.39
63	PX2KREX	1RA	M63	15.0	115	53.7	54.0	54.6	65.8	0.6	1.6	2.0	2.5	80.0	88.0	80.3	PVC25	1.41
75S	PX2KREX	1RA	M75	15.0	140	59.9	60.2	59.0	72.0	0.6	1.6	2.0	2.5	90.0	99.0	86.8	PVC28	2.09
75	PX2KREX	1RA	M75	15.0	140	64.2	64.2	66.7	78.4	0.6	1.6	2.5	3.0	100.0	110.0	88.3	PVC30	2.54
90	PX2KREX	1RA	M90	20.0	140	75.3	75.6	76.2	90.3	0.8	1.6	3.15	4.0	115.0	126.5	102.1	PVC32	3.71
100	PX2KREX	1RA	M100	20.0	200	83.6	85.9	86.1	101.4	0.8	1.6	3.15	4.0	127.0	139.7	114.0	LSF33	4.31

For material options add the following suffix to the ordering reference; Brass (no suffix required); Nickel Plated Brass 'S'; 316 Grade Stainless Steel '4'; Copper Free Aluminium '1'
For NPT options please add the following digits to the material suffix; 1/2" = 31, 3/4" = 32, 1" = 33, 1 1/4" = 34, 1 1/2" = 35, 2" = 36, 2 1/2" = 37, 3" = 38, 3 1/2" = 39, 4" = 310 (Brass requires prefix "0")

Examples: 32PX2KREX1RA534 = Nickel Plated Brass 1 1/4" NPT, 50SPX2KREX1RA035 = Brass 1 1/2" NPT, 25PX2KREX1RA432 = Stainless Steel 3/4" NPT, 20PX2KREX1RA5 = Nickel Plated Brass M20

Dimensions are displayed in millimetres unless otherwise stated